

1 / 5

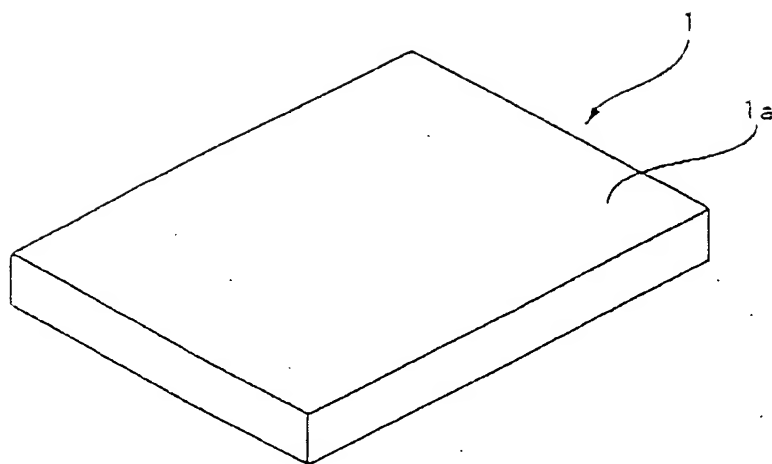


FIG. 1

2 / 5

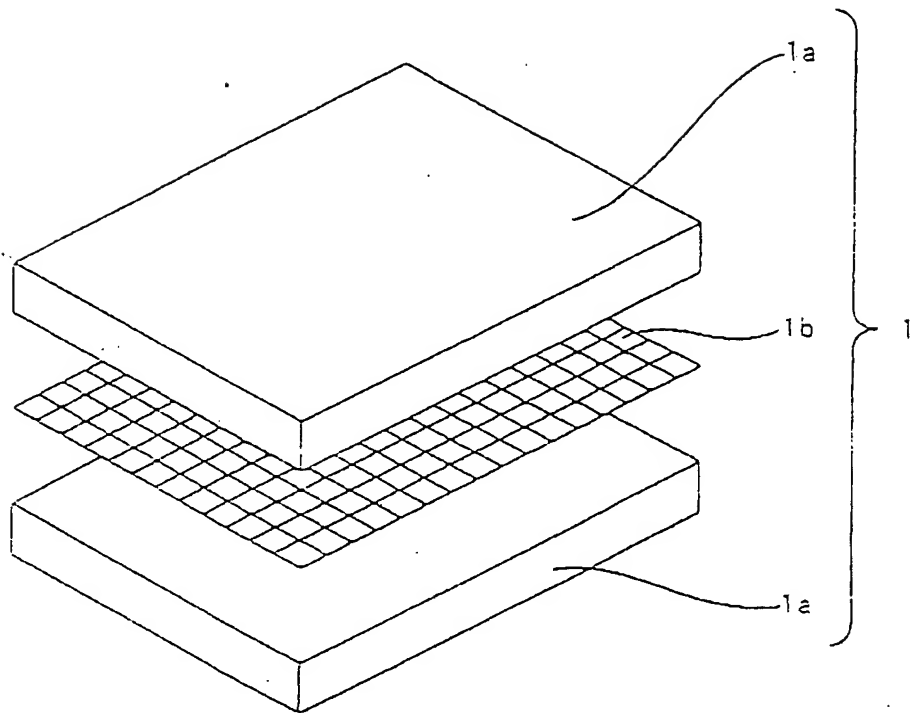


FIG. 2A

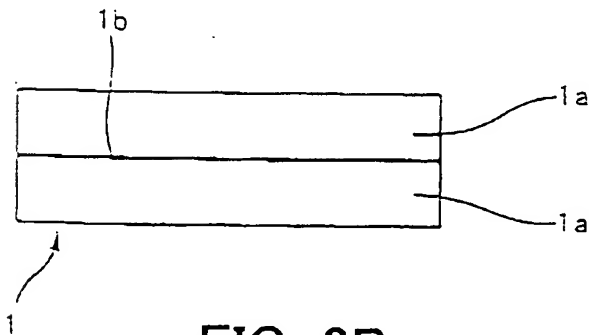


FIG. 2B

3 / 5

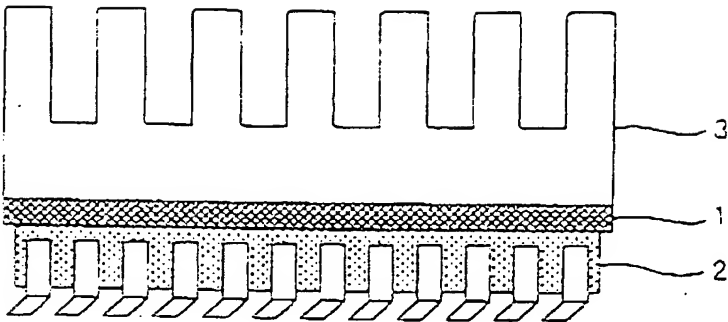


FIG. 3

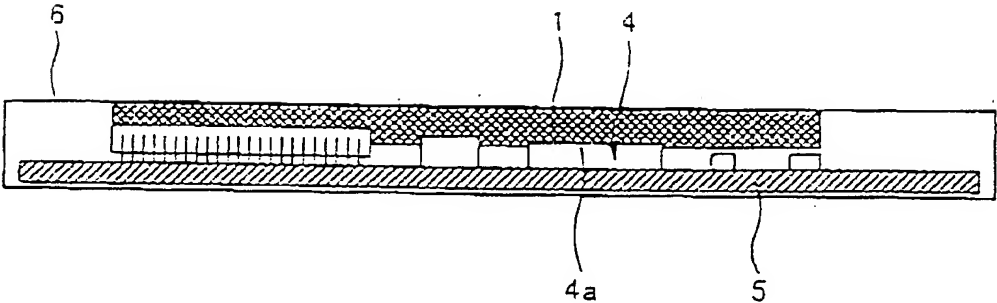


FIG. 4

4 / 5

	Mixed Quantity of Powder (for 100 parts by weight of Liquid Silicon Resin)	Rubber Hardness	Thermal Conductivity (w/mk)
Sample A	Mn-Zn-base Ferrite Powder : 400 parts by weight	29	0.7
Sample B	Mn-Zn-base Ferrite Powder : 600 parts by weight	45	0.95
Sample C	Mn-Zn-base Ferrite Powder : 300 parts by weight Al ₂ O ₃ powder: 100 parts by weight	27	1.2
Sample D	Ni-Zn-base Ferrite Powder : 400 parts by weight	29	0.8

FIG. 5

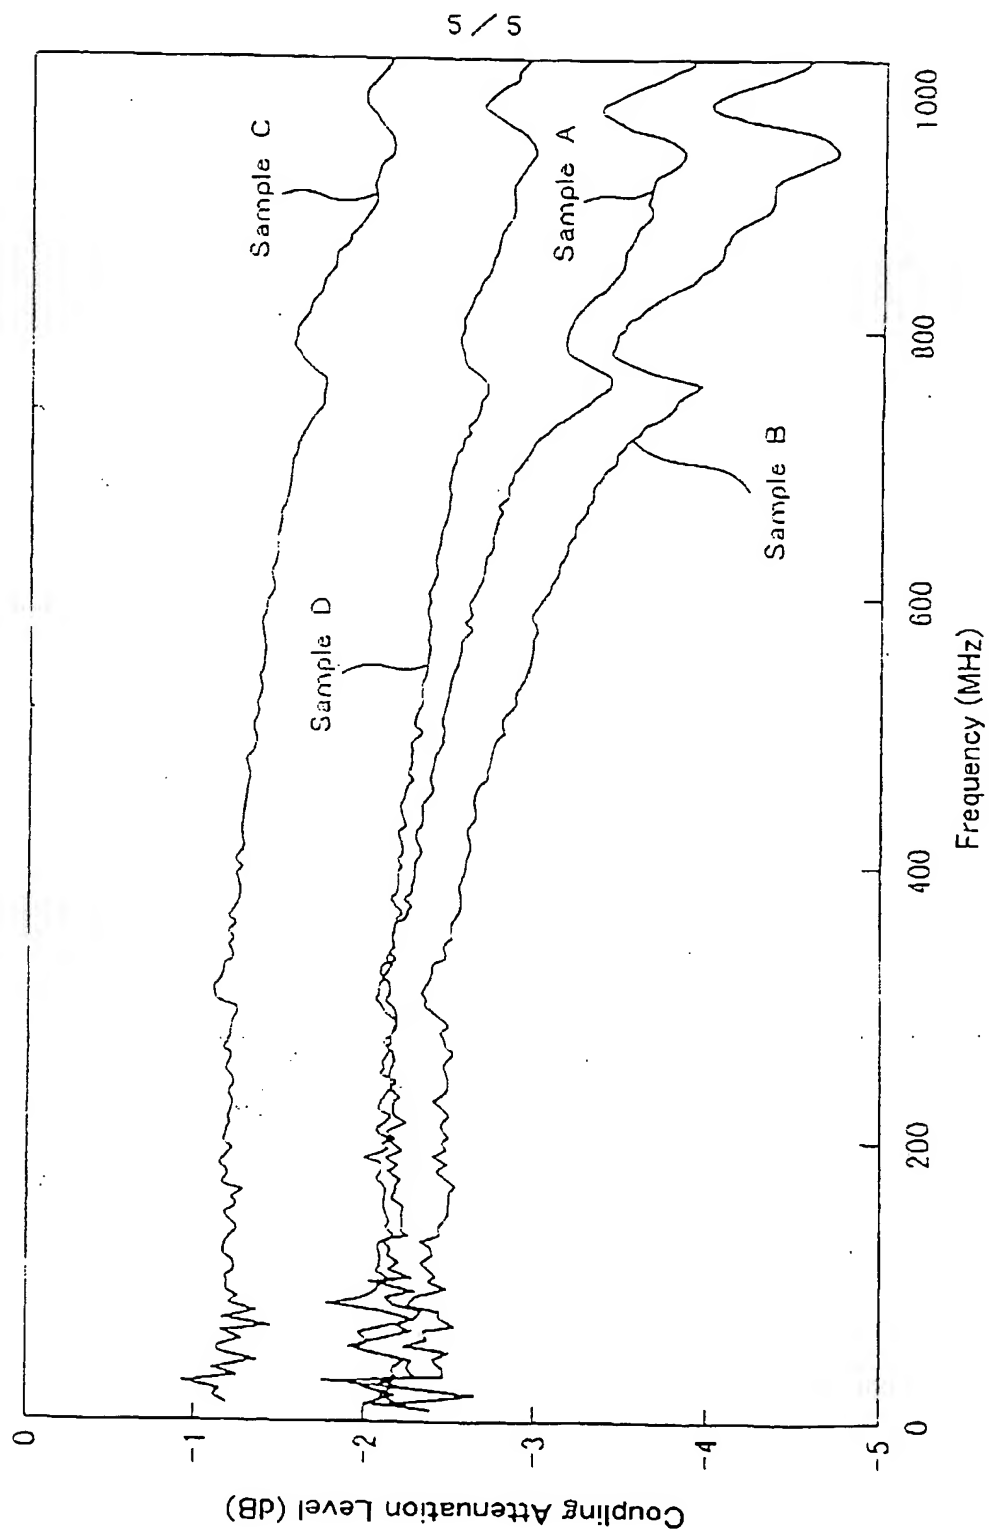


FIG. 6